

# TRANSDRIVE<sup>®</sup>

## DRIVE PERFORMANCE



## Circlips

[transdrive.com.au](http://transdrive.com.au)

# TRANSDRIVE<sup>®</sup>

## DRIVE PERFORMANCE

TransDrive was established to bring together our passion and experience in power transmission by being able to offer affordable, high-quality products to the power transmission and bearing market. Built on the philosophy of improving performance and quality of all of our TransDrive products.

Transdrive products have been manufactured and tested to meet ISO standards and the tough, working conditions of heavy industries.

Our team have experience in power transmission and bearings. Every product we design and manufacture is backed by years of industry knowledge and an understanding of what our customers and the market need.

At TransDrive, our goal is simple: to provide accessible, high-quality products at affordable pricing. With an unwavering commitment to excellence, TransDrive operates with a focus on providing innovative industry solutions.

Whether it is through our custom products, the standard range of pulleys, slew drives, chains and sprockets, TransDrive is dedicated to delivering effective solutions for the trades that offer increased productivity and reliability.

## Distributors

### Western Australia

#### Chain & Drives, Wangara

Unit 1, 45 Inspiration Drive,  
Wangara, WA 6065 Australia

**P** +61 8 9303 4966

**E** [support@chainanddrives.com.au](mailto:support@chainanddrives.com.au)

#### Chain & Drives, Welshpool

Unit 16, 51-53 Kewdale Road,  
Welshpool, WA 6106 Australia

**P** +61 8 6314 1155

**E** [support@chainanddrives.com.au](mailto:support@chainanddrives.com.au)

### New South Wales

#### Chain & Drives, Arndell Park

Unit 7/70 Holbeche Road,  
Arndell Park, NSW 2148 Australia

**P** +61 2 9674 8611

**E** [salesnsw@chainanddrives.com.au](mailto:salesnsw@chainanddrives.com.au)

### Become a TransDrive Dealer

#### Interested in becoming a TransDrive Dealer?

Get in touch:

**E** [info@transdrive.com.au](mailto:info@transdrive.com.au)

# Contents

## Circlips


Internal	4	External	7
----------	---	----------	---

## Stainless Steel Circlips

SS1400 - External	12	SS1400 - External	13
-------------------	----	-------------------	----

## Heavy Duty Circlips


14

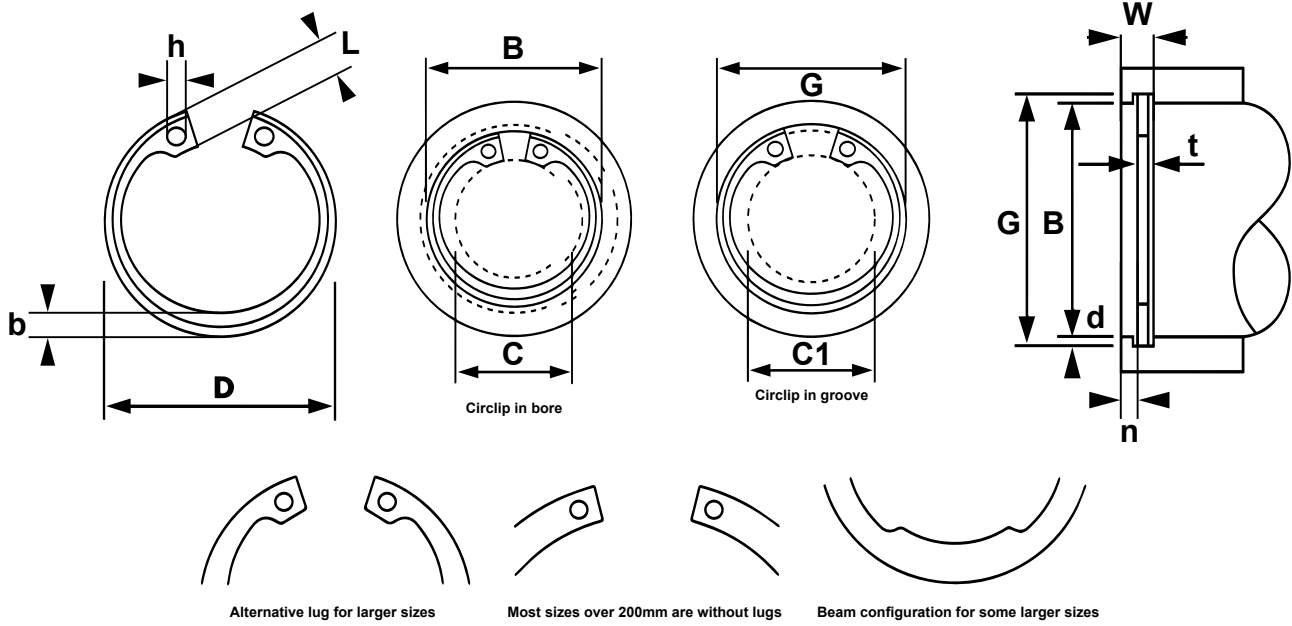

Size Code	Bore		Groove (G)						Circlips (F)									
	B	G	Tol.	W	Tol.	n (min.)	d~	t	Tol.	D	Tol.	C	C1	L (max)	b~	h(min.)		
1300-8	8	8.4	"(+) <sup>0.09</sup> (-) <sup>0.00</sup> "	0.9	"(+) <sup>0.14</sup> (-) <sup>0.00</sup> "	0.6	0.2	0.8	-	8.7	"(+) <sup>0.36</sup> (-) <sup>0.10</sup> "	3	3.6	2.4	1.1	1		
1300-9	9	9.4		0.9		0.6	0.2	0.8	-	9.8		3.7	4.4	2.5	1.3	1		
1300-10	10	10.4	1.1	0.6		0.2	1	-	10.8	3.3		4	3.2	1.4	1.2			
1300-11	11	11.4	1.1	0.6		0.2	1	-	11.8	4.1		4.8	3.3	1.5	1.2			
1300-12	12	12.5	1.1	0.8		0.25	1	-	13	4.9		5.7	3.4	1.7	1.5			
1300-13	13	13.6	"(+) <sup>0.11</sup> (-) <sup>0.00</sup> "	1.1		0.9	0.3	1	-	14.1		5.4	6.4	3.6	1.8	1.5		
1300-14	14	14.6		1.1		0.9	0.3	1	-	15.1		6.2	7.2	3.7	1.9	1.7		
1300-15	15	15.7	1.1	1.1		0.35	1	-	16.2	7.2		8.3	3.7	2	1.7			
1300-16	16	16.8	1.1	1.2		0.4	1	-	17.3	8		9.2	3.8	2	1.7			
1300-17	17	17.8	1.1	1.2		0.4	1	-	18.3	8.8		10	3.9	2.1	1.7			
1300-18	18	19	1.1	1.5		0.5	1	-	19.5	9.4		10.8	4.1	2.2	2			
1300-19	19	20	1.1	1.5		0.5	1	-	20.5	10.4		11.8	4.1	2.2	2			
1300-20	20	21	"(+) <sup>0.13</sup> (-) <sup>0.00</sup> "	1.1		"(+) <sup>0.14</sup> (-) <sup>0.00</sup> "	1.5	0.5	1	-		21.5	"(+) <sup>0.42</sup> (-) <sup>0.13</sup> "	11.2	12.6	4.2	2.3	2
1300-21	21	22		1.1			1.5	0.5	1	-		22.5		12.2	13.6	4.2	2.4	2
1300-22	22	23	1.1	1.5			0.5	1	-	23.5		13.2		14.6	4.2	2.5	2	
1300-23	23	24.1	1.3	1.7			0.6	1.2	-	24.6		14.2		15.7	4.2	2.5	2	
1300-24	24	25.2	1.3	1.8	0.6		1.2	-	25.9	14.8	16.4	4.4		2.6	2			
1300-25	25	26.2	"(+) <sup>0.21</sup> (-) <sup>0.00</sup> "	1.3	1.8		0.6	1.2	-	26.9	15.5	17.2		4.5	2.7	2		
1300-26	26	27.2		1.3	1.8		0.6	1.2	-	27.9	16.1	17.8		4.7	2.8	2		
1300-27	27	28.4	1.3	2.1	0.7		1.2	-	29.1	17.1	19	4.7		2.9	2			
1300-28	28	29.4	1.3	2.1	0.7		1.2	-	30.1	17.9	19.8	4.8		2.9	2			
1300-29	29	30.4	"(+) <sup>0.25</sup> (-) <sup>0.00</sup> "	1.3	2.1		0.7	1.2	-	31.1	"(+) <sup>0.42</sup> (-) <sup>0.21</sup> "	18.9		20.8	4.8	3	2	
1300-30	30	31.4		1.3	2.1		0.7	1.2	-	32.1		19.9		21.8	4.8	3	2	
1300-31	31	32.7		1.3	2.6		0.85	1.2	-	33.4		20		22.3	5.2	3.2	2.5	
1300-32	32	33.7		1.3	2.6		0.85	1.2	-	34.4		20.6		22.9	5.4	3.2	2.5	
1300-33	33	34.7	1.3	2.6	0.85		1.2	-	35.5	21.6	23.9	5.4		3.3	2.5			

Size Code	Bore		Groove (G)						Circlips (F)							
	B	G	Tol.	W	Tol.	n (min.)	d~	t	Tol.	D	Tol.	C	C1	L (max)	b~	h(min.)
1300-34	34	35.7	"(+0.25 (-)0.00"	1.6	"(+0.00 (-)0.06"	2.6	0.85	1.5	"(+0.00 (-)0.06"	36.5	"(+0.50 (-)0.25"	22.6	24.9	5.4	3.3	2.5
1300-35	35	37		1.6		3	1	1.5		37.8		23.6	26.2	5.4	3.4	2.5
1300-36	36	38		1.6		3	1	1.5		38.8		24.6	27.2	5.4	3.5	2.5
1300-37	37	39		1.6		3	1	1.5		39.8		25.4	28	5.5	3.6	2.5
1300-38	38	40		1.6		3	1	1.5		40.8		26.4	29	5.5	3.7	2.5
1300-39	39	41		1.6		3	1	1.5		42		27.3	29.8	5.6	3.8	2.5
1300-40	40	42.5		1.85		3.8	1.25	1.75		43.5		27.8	30.9	5.8	3.9	2.5
1300-41	41	43.5		1.85		3.8	1.25	1.75		44.5		28.6	31.7	5.9	4	2.5
1300-42	42	44.5		1.85		3.8	1.25	1.75		45.5		29.6	32.7	5.9	4.1	2.5
1300-43	43	45.5		1.85		3.8	1.25	1.75		46.5		30.6	33.7	5.9	4.2	2.5
1300-44	44	46.5	1.85	3.8	1.25	1.75	47.5	31.4	34.5	6	4.2	2.5				
1300-45	45	47.5	1.85	3.8	1.25	1.75	48.5	32	35.1	6.5	4.3	2.5				
1300-46	46	48.5	1.85	3.8	1.25	1.75	49.5	32.8	35.9	6.3	4.4	2.5				
1300-47	47	49.5	1.85	3.8	1.25	1.75	50.5	33.5	36.7	6.4	4.4	2.5				
1300-48	48	50.5	"(+0.14 (-)0.00"	1.85	"(+0.00 (-)0.07"	3.8	1.25	1.75	"(+0.00 (-)0.07"	51.5	"(+0.90 (-)0.39"	34.5	37.7	6.4	4.5	2.5
1300-50	50	53		2.15		4.5	1.5	2		54.2		36.3	40	6.5	4.6	2.5
1300-51	51	54		2.15		4.5	1.5	2		55.2		37.3	41	6.5	4.7	2.5
1300-52	52	55		2.15		4.5	1.5	2		56.2		37.9	41.6	6.7	4.7	2.5
1300-53	53	56		2.15		4.5	1.5	2		57.2		39	42.6	6.7	4.9	2.5
1300-54	54	57		2.15		4.5	1.5	2		58.2		40	43.6	6.7	5	2.5
1300-55	55	58		2.15		4.5	1.5	2		59.2		40.7	44.4	6.8	5	2.5
1300-56	56	59		2.15		4.5	1.5	2		60.2		41.7	45.4	6.8	5.1	2.5
1300-57	57	60		2.15		4.5	1.5	2		61.2		42.7	46.4	6.8	5.2	2.5
1300-58	58	61		2.15		4.5	1.5	2		62.2		43.5	47.2	6.9	5.2	2.5
1300-60	60	63	"(+0.30 (-)0.00"	2.15	"(+0.00 (-)0.07"	4.5	1.5	2	"(+0.00 (-)0.07"	64.2	"(+1.10 (-)0.46"	44.7	48.4	7.3	5.4	2.5
1300-61	61	64		2.15		4.5	1.5	2		65.2		45.7	49.4	7.3	5.4	2.5
1300-62	62	65		2.15		4.5	1.5	2		66.2		46.7	50.4	7.3	5.5	2.5
1300-63	63	66		2.15		4.5	1.5	2		67.2		47.7	51.4	7.3	5.6	2.5
1300-64	64	67		2.15		4.5	1.5	2		68.2		48.7	52.4	7.4	5.7	2.5
1300-65	65	68		2.65		4.5	1.5	2.5		69.2		49	52.8	7.6	5.8	3
1300-67	67	70		2.65		4.5	1.5	2.5		71.5		50.8	54.6	7.7	6	3
1300-68	68	71		2.65		4.5	1.5	2.5		72.5		51.6	55.4	7.8	6.1	3
1300-70	70	73		2.65		4.5	1.5	2.5		74.5		53.6	57.4	7.8	6.2	3
1300-72	72	75		2.65		4.5	1.5	2.5		76.5		55.6	59.4	7.8	6.4	3
1300-75	75	78	2.65	4.5	1.5	2.5	79.5	58.6	62.4	7.8	6.6	3				
1300-77	77	80	2.65	4.5	1.5	2.5	82.5	59.2	63	8.5	6.8	3				
1300-78	78	81	"(+0.35 (-)0.00"	2.65	"(+0.00 (-)0.07"	4.5	1.5	2.5	"(+0.00 (-)0.07"	82.5	"(+1.30 (-)0.54"	60.1	64	8.5	6.8	3
1300-80	80	83.5		2.65		5.3	1.75	2.5		85.5		62.1	66.5	8.5	7	3
1300-81	81	84.5		2.65		5.3	1.75	2.5		86.5		62.2		8.5	7	3

Size Code	Bore			Groove (G)						Circlips (F)										
	B	G	Tol.	W	Tol.	n (min.)	d~	t	Tol.	D	Tol.	C	C1	L (max)	b~	h(min.)				
1300-82	82	85.5	"(+) $0.35$ (-) $0.00$ "	2.65	"(+) $0.14$ (-) $0.00$ "	5.3	1.75	2.5	"(+) $0.00$ (-) $0.07$ "	87.5	"(+) $1.30$ (-) $0.54$ "	64.1	68.5	8.5	7	3				
1300-83	83	86.5		2.65		5.3	1.75	2.5		88.5		65.2	69.5	8.5	7	3				
1300-85	85	88.5		3.15		5.3	1.75	3		90.5		66.9	71.3	8.6	7.2	3.5				
1300-87	87	90.5		3.15		5.3	1.75	3		93.5		69	73.3	8.6	7.4	3.5				
1300-88	88	91.5		3.15		5.3	1.75	3		93.5		69.9	74.3	8.6	7.4	3.5				
1300-90	90	93.5		3.15		5.3	1.75	3		95.5		71.9	76.3	8.6	7.6	3.5				
1300-92	92	95.5		3.15		5.3	1.75	3		97.5		73.7	78.1	8.7	7.8	3.5				
1300-95	95	98.5		3.15		5.3	1.75	3		100.5		76.5	80.9	8.8	8.1	3.5				
1300-97	97	100.5		3.15		5.3	1.75	3		103.5		78.1	82.5	9	8.3	3.5				
1300-98	98	101.5		3.15		5.3	1.75	3		103.5		79	83.5	9	8.3	3.5				
1300-100	100	103.5	3.15	5.3	1.75	3	105.5	80.6	85.1	9.2	8.4	3.5								
1300-102	102	106	"(+) $0.54$ (-) $0.00$ "	4.15	"(+) $0.18$ (-) $0.00$ "	6	2	4	"(+) $0.00$ (-) $0.10$ "	108	"(+) $1.50$ (-) $0.63$ "	82	87	9.5	8.5	3.5				
1300-105	105	109		4.15		6	2	4		112		85	90	9.5	8.7	3.5				
1300-107	107	111		4.15		6	2	4		115		87	92	9.5	8.9	3.5				
1300-108	108	112		4.15		6	2	4		115		88	93	9.5	8.9	3.5				
1300-110	110	114		4.15		6	2	4		117		88.2	93.2	10.4	9	3.5				
1300-112	112	116		4.15		6	2	4		119		90	95	10.5	9.1	3.5				
1300-115	115	119		4.15		6	2	4		122		93	98	10.5	9.3	3.5				
1300-117	117	121		4.15		6	2	4		125		94.6	99.6	10.7	9.6	3.5				
1300-118	118	122		4.15		6	2	4		125		95.6	100.6	10.7	9.6	3.5				
1300-120	120	124		4.15		6	2	4		127		96.9	102	11	9.7	3.5				
1300-125	125	129	4.15	6	2	4	132	101.9	107	11	10	4								
1300-127	127	131	4.15	6	2	4	135	103.9	109	11	10	4								
1300-128	128	132	4.15	6	2	4	135	104.9	110	11	10	4								
1300-130	130	134	4.15	6	2	4	137	106.9	112	11	10.2	4								
1300-135	135	139	"(+) $0.63$ (-) $0.00$ "	4.15	"(+) $0.18$ (-) $0.00$ "	6	2	4	"(+) $0.00$ (-) $0.10$ "	142	"(+) $1.50$ (-) $0.63$ "	111.5	116	11.2	10.5	4				
1300-140	140	144		4.15		6	2	4		147		116.5	121	11.2	10.7	4				
1300-145	145	149		4.15		6	2	4		152		121	126	11.4	10.9	4				
1300-150	150	155		4.15		7.5	2.5	4		158		124.8	131	12	11.2	4				
1300-155	155	160		4.15		7.5	2.5	4		164		129.8	136	12	11.4	4				
1300-160	160	165		4.15		7.5	2.5	4		169		132.7	144	13	11.6	4				
1300-165	165	170		4.15		7.5	2.5	4		174.5		137.7	144	13	11.8	4				
1300-170	170	175		4.15		7.5	2.5	4		179.5		141.6	148	13.5	12.2	4				
1300-175	175	180		"(+) $0.72$ (-) $0.00$ "		4.15	"(+) $0.18$ (-) $0.00$ "	7.5		2.5		4	"(+) $0.00$ (-) $0.10$ "	184.5	"(+) $1.7$ (-) $0.72$ "	146.6	153	13.5	12.7	4
1300-180	180	185				4.15		7.5		2.5		4		189.5		150.2	156	14.2	13.2	4
1300-185	185	190	4.15		7.5	2.5		4	194.5	155.2	161	14.2		13.7		4				
1300-190	190	195	4.15		7.5	2.5		4	199.5	160.2	166	14.2		13.8		4				
1300-195	195	200	4.15		7.5	2.5		4	204.5	165.2	171	14.2		13.8		4				
1300-200	200	205	4.15		7.5	2.5		4	209.5	170.2	176	14.2		14		4				

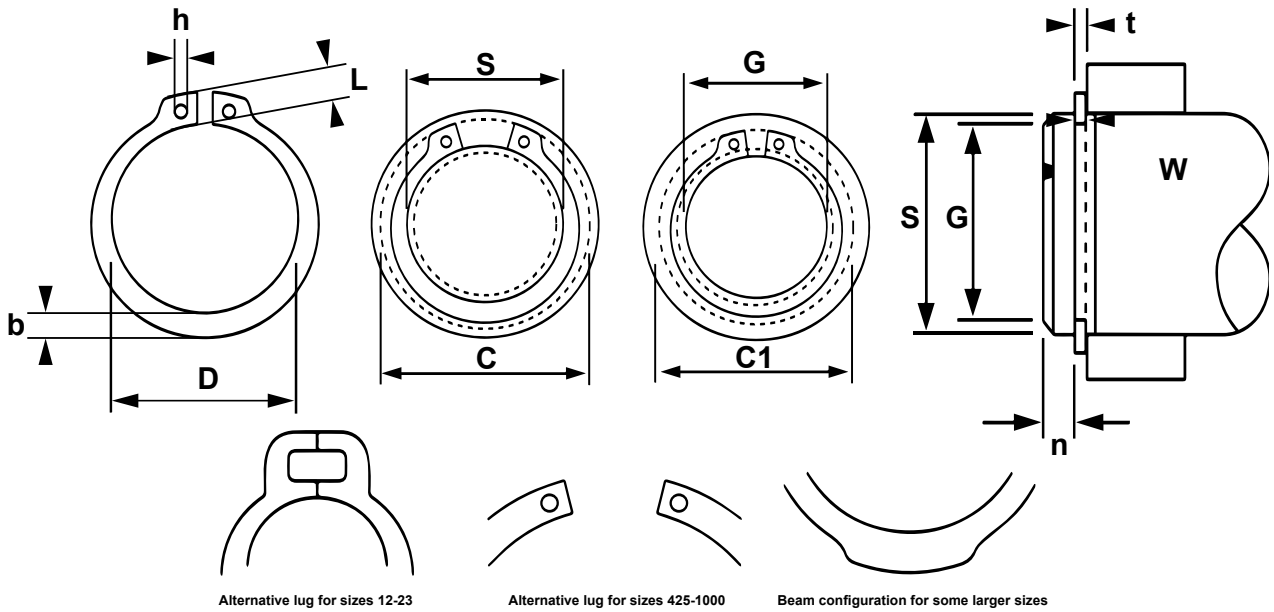

Alternative lug for sizes 12-23

Alternative lug for sizes 425-1000


Beam configuration for some larger sizes

Size Code	Shaft		Groove (G)						Circlips (F)							
	S	G	Tol.	W	Tol.	n (min.)	d~	t	Tol.	D	Tol.	C	C1	L (max)	b~	h(min.)
1400-3	3	2.8	(+) $0.00$ (-) $0.04$	0.5		0.3	0.1	0.4		2.7		7	6.6	1.9	0.8	1
1400-4	4	3.8		0.5		0.3	0.1	0.4		3.7	"(+) $0.04$ (-) $0.15$ "	8.6	8.2	2.2	0.9	1
1400-5	5	4.8	(+) $0.00$ (-) $0.048$	0.7		0.3	0.1	0.6	"(+) $0.00$ (-) $0.05$ "	4.7		10.3	9.8	2.5	1.1	1
1400-6	6	5.7		0.8		0.5	0.15	0.7		5.6		11.7	11.1	2.7	1.3	1.2
1400-7	7	6.7		0.9		0.5	0.15	0.8		6.5		13.5	12.9	3.1	1.4	1.2
1400-8	8	7.6	(+) $0.00$ (-) $0.06$	0.9		0.6	0.2	0.8		7.4	"(+) $0.06$ (-) $0.18$ "	14.7	14	3.2	1.5	1.2
1400-9	9	8.6		1.1		0.6	0.2	1		8.4		16	15.2	3.3	1.7	1.2
1400-10	10	9.6		1.1		0.6	0.2	1		9.3		17	16.2	3.3	1.8	1.5
1400-11	11	10.5		1.1		0.8	0.25	1		10.2		18	17.1	3.3	1.8	1.7
1400-12	12	11.5		1.1		0.8	0.25	1		11		19	18.1	3.3	1.8	1.7
1400-13	13	12.4		1.1		0.9	0.3	1		11.9		20.2	19.2	3.4	2	1.7
1400-14	14	13.4		1.1		0.9	0.3	1		12.9	"(+) $0.10$ (-) $0.36$ "	21.4	20.4	3.5	2.1	1.7
1400-15	15	14.3	(+) $0.00$ (-) $0.11$	1.1	"(+) $0.14$ (-) $0.00$ "	1.1	0.35	1		13.8		22.5	21.5	3.6	2.2	1.7
1400-16	16	15.2		1.1		1.2	0.4	1		14.7		23.8	22.6	3.7	2.2	1.7
1400-17	17	16.2		1.1		1.2	0.4	1		15.7		25	23.8	3.8	2.3	1.7
1400-18	18	17		1.3		1.5	0.5	1.2	"(+) $0.00$ (-) $0.06$ "	16.5		26.2	24.8	3.9	2.4	2
1400-19	19	18		1.3		1.5	0.5	1.2		17.5		27.2	25.8	3.9	2.5	2
1400-20	20	19		1.3		1.5	0.5	1.2		18.5		28.4	27	4	2.6	2
1400-21	21	20	(+) $0.00$ (-) $0.13$	1.3		1.5	0.5	1.2		19.5	"(+) $0.13$ (-) $0.42$ "	29.6	28.2	4.1	2.7	2
1400-22	22	21		1.3		1.5	0.5	1.2		20.5		30.8	29.4	4.2	2.8	2
1400-23	23	22		1.3		1.5	0.5	1.2		21.5		32	30.6	4.3	2.9	2
1400-24	24	22.9		1.3		1.7	0.55	1.2		22.2		33.2	31.7	4.4	3	2
1400-25	25	23.9		1.3		1.7	0.55	1.2		23.2		34.2	32.7	4.4	3	2
1400-26	26	24.9	(+) $0.00$ (-) $0.21$	1.3		1.7	0.55	1.2		24.2	"(+) $0.21$ (-) $0.42$ "	35.5	33.9	4.5	3.1	2
1400-27	27	25.6		1.3		2.1	0.7	1.2		24.9		36.7	34.8	4.6	3.1	2
1400-28	28	26.6		1.6		2.1	0.7	1.5		25.9		37.9	36	4.7	3.2	2

Size Code	Shaft			Groove (G)						Circlips (F)						
	S	G	Tol.	W	Tol.	n (min.)	d~	t	Tol.	D	Tol.	C	C1	L (max)	b~	h(min.)
1400-29	29	27.6		1.6		2.1	0.7	1.5		26.9		39.1	37.2	4.8	3.4	2
1400-30	30	28.6	"(+) 0.00 (-) 0.21"	1.6		2.1	0.7	1.5		27.9	"(+) 0.21 (-) 0.42"	40.5	38.6	5	3.5	2
1400-31	31	29.3		1.6		2.6	0.85	1.5		28.6		41.7	40.9	5.1	3.5	2.5
1400-32	32	30.3		1.6		2.6	0.85	1.5		29.6		43	40.7	5.2	3.6	2.5
1400-33	33	31.3		1.6		2.6	0.85	1.5		30.5		44	41.7	5.2	3.7	2.5
1400-34	34	32.3		1.6		2.6	0.85	1.5		31.5		45.4	43.1	5.4	3.8	2.5
1400-35	35	33		1.6		3	1	1.5		32.2		46.8	44.2	5.6	3.9	2.5
1400-36	36	34		1.85		3	1	1.75		33.2	"(+) 0.25 (-) 0.5"	47.8	45.2	5.6	4	2.5
1400-37	37	35		1.85		3	1	1.75		34.2		49	47	5.7	4.1	2.5
1400-38	38	36		1.85		3	1	1.75	"(+) 0.00 (-) 0.06"	35.2		50.2	47.6	5.8	4.2	2.5
1400-39	39	37		1.85		3	1	1.75		36		51.4	48.5	5.9	4.3	2.5
1400-40	40	37.5		1.85		3.8	1.25	1.75		36.5		52.6	49.5	6	4.4	2.5
1400-41	41	38.5	"(+) 0.00 (-) 0.25"	1.85		3.8	1.25	1.75		37.5		54	51.5	6.2	4.5	2.5
1400-42	42	39.5		1.85		3.8	1.25	1.75		38.5		55.7	52.5	6.5	4.5	2.5
1400-43	43	40.5		1.85		3.8	1.25	1.75		39.5		56.8	53.5	6	5.3	2.5
1400-44	44	41.5		1.85		3.8	1.25	1.75		40.5		57.9	55.4	6.6	4.6	2.5
1400-45	45	42.5		1.85		3.8	1.25	1.75		41.5		59.1	55.9	6.7	4.7	2.5
1400-46	46	43.5		1.85		3.8	1.25	1.75		42.5		60.1	56.9	6.7	4.8	2.5
1400-47	47	44.5		1.85		3.8	1.25	1.75		43.5	"(+) 0.39 (-) 0.90"	61.3	58.1	6.8	4.9	2.5
1400-48	48	45.5		1.85	"(+) 0.14 (-) 0.00"	3.8	1.25	1.75		44.5		62.5	59.3	6.9	5	2.5
1400-50	50	47		2.15		4.5	1.5	2		45.8		64.5	60.8	6.9	5.1	2.5
1400-51	51	48		2.15		4.5	1.5	2		46.8		65.6	61.9	6.9	5	2.5
1400-52	52	49		2.15		4.5	1.5	2		47.8		66.7	63	7	5.2	2.5
1400-53	53	50		2.15		4.5	1.5	2		48.8		68.8	64.1	7	6.3	2.5
1400-54	54	51		2.15		4.5	1.5	2		49.8		69	65.2	7.1	5.3	2.5
1400-55	55	52		2.15		4.5	1.5	2		50.8		70.2	66.4	7.2	5.4	2.5
1400-56	56	53		2.15		4.5	1.5	2		51.8		71.6	67.6	7.3	5.5	2.5
1400-57	57	54		2.15		4.5	1.5	2		52.8		72.3	69.3	7.3	5.5	2.5
1400-58	58	55		2.15		4.5	1.5	2		53.8		73.6	69.6	7.3	5.6	2.5
1400-60	60	57		2.15		4.5	1.5	2	"(+) 0.00 (-) 0.07"	55.8		75.6	71.8	7.4	5.8	2.5
1400-61	61	58		2.15		4.5	1.5	2		56.8		76.7	72.9	7.4	5.9	2.5
1400-62	62	59	"(+) 0.00 (-) 0.30"	2.15		4.5	1.5	2		57.8	"(+) 0.46 (-) 1.10"	77.8	74	7.5	6	2.5
1400-63	63	60		2.15		4.5	1.5	2		58.8		79	75.2	7.6	6.2	2.5
1400-64	64	61		2.15		4.5	1.5	2		59.8		80.2	76.4	7.8	7.4	2.5
1400-65	65	62		2.65		4.5	1.5	2.5		60.8		81.4	77.6	7.8	6.3	3
1400-67	67	64		2.65		4.5	1.5	2.5		62.5		83.6	79.8	7.9	6.4	3
1400-68	68	65		2.65		4.5	1.5	2.5		63.5		84.4	81	8	6.5	3
1400-70	70	67		2.65		4.5	1.5	2.5		65.5		87	83.2	8.1	6.6	3
1400-72	72	69		2.65		4.5	1.5	2.5		67.5		89.2	85.4	8.2	6.8	3





Size Code	Shaft			Groove (G)						Circlips (F)						
	S	G	Tol.	W	Tol.	n (min.)	d~	t	Tol.	D	Tol.	C	C1	L (max)	b~	h(min.)
1400-75	75	72		2.65		4.5	1.5	2.5		70.5		92.7	88.8	8.4	7	3
1400-77	77	74		2.65		4.5	1.5	2.5		72.5		94.9	91	8.5	7.2	3
1400-78	78	75	"(+) 0.00 (-) 0.30"	2.65	"(+) 0.14 (-) 0.00"	4.5	1.5	2.5	"(+) 0.00 (-) 0.07"	73.5	"(+) 0.46 (-) 1.10"	96.1	92.2	8.6	7.3	3
1400-80	80	76.5		2.65		5.3	1.75	2.5		74.5		98.1	93.7	8.6	7.4	3
1400-82	82	78.5		2.65		5.3	1.75	2.5		76.5		100.3	95.9	8.7	7.6	3
1400-85	85	81.5		3.15		5.3	1.75	3		79.5		103.3	98.9	8.7	7.8	3.5
1400-87	87	83.5		3.15		5.3	1.75	3		81.5		105.5	100.9	8.8	7.9	3.5
1400-88	88	84.5		3.15		5.3	1.75	3		82.5		106.5	102	8.8	8	3.5
1400-90	90	86.5		3.15		5.3	1.75	3		84.5		108.5	104	8.8	8.2	3.5
1400-92	92	88.5	"(+) 0.00 (-) 0.35"	3.15		5.3	1.75	3	"(+) 0.00 (-) 0.08"	86.5		110.9	107.4	9	8.4	3.5
1400-95	95	91.5		3.15		5.3	1.75	3		89.5		114.8	111	9.4	8.6	3.5
1400-97	97	93.5		3.15		5.3	1.75	3		91.5		116.7	113.2	9.4	8.8	3.5
1400-98	98	94.5		3.15		5.3	1.75	3		91.5		118.6	114	9.4	8.8	3.5
1400-100	100	96.5		3.15		5.3	1.75	3		94.5	"(+) 0.54 (-) 1.30"	120.2	116	9.6	9	3.5
1400-102	102	98		4.15		6	2	4		95		122.4	118	9.7	9.2	3.5
1400-105	105	101		4.15		6	2	4		98		126.2	122	9.9	9.3	3.5
1400-110	110	106		4.15		6	2	4		103		131.2	127	10.1	9.6	3.5
1400-112	112	108	"(+) 0.00 (-) 0.54"	4.15		6	2	4		105		133.6	129.6	10.3	9.7	3.5
1400-115	115	111		4.15		6	2	4		108		137.3	133	10.6	9.8	3.5
1400-120	120	116		4.15		6	2	4		113		143.1	138	11	10.2	3.5
1400-122	122	118		4.15		6	2	4		115		145.5	141.5	11.2	10.3	4
1400-125	125	121		4.15	"(+) 0.18 (-) 0.00"	6	2	4		118		149	144	11.4	10.4	4
1400-127	127	123		4.15		6	2	4		120		150.9	146.8	11.4	10.5	4
1400-128	128	124		4.15		6	2	4		120		151.9	147.9	11.4	10.5	4
1400-130	130	126		4.15		6	2	4		123		154.4	150	11.6	10.7	4
1400-135	135	131		4.15		6	2	4		128		159.8	155	11.8	11	4
1400-140	140	136		4.15		6	2	4	"(+) 0.00 (-) 0.1"	133		165.2	160	12	11.2	4
1400-145	145	141		4.15		6	2	4		138		170.6	166	12.2	11.5	4
1400-150	150	145	"(+) 0.00 (-) 0.63"	4.15		7.5	2.5	4		142	"(+) 0.63 (-) 1.5"	177.3	171	13	11.8	4
1400-155	155	150		4.15		7.5	2.5	4		146		182.3	176	13	12	4
1400-160	160	155		4.15		7.5	2.5	4		151		188	182	13.3	12.2	4
1400-165	165	160		4.15		7.5	2.5	4		155.5		193.4	187	13.5	12.5	4
1400-170	170	165		4.15		7.5	2.5	4		160.5		198.4	192	13.5	12.9	4
1400-175	175	170		4.15		7.5	2.5	4		165.5		203.4	197	13.5	12.9	4
1400-180	180	175		4.15		7.5	2.5	4		170.5		210	204	14.2	13.5	4
1400-185	185	180		4.15		7.5	2.5	4		175.5		215.2	209	14.2	13.5	4
1400-190	190	185		4.15		7.5	2.5	4		180.5	"(+) 0.72 (-) 1.7"	220	214	14.2	14	4
1400-195	195	190	"(+) 0.00 (-) 0.72"	4.15		7.5	2.5	4		185.5		225	219	14.2	14	4
1400-200	200	195		4.15		7.5	2.5	4		190.5		230	224	14.2	14	4

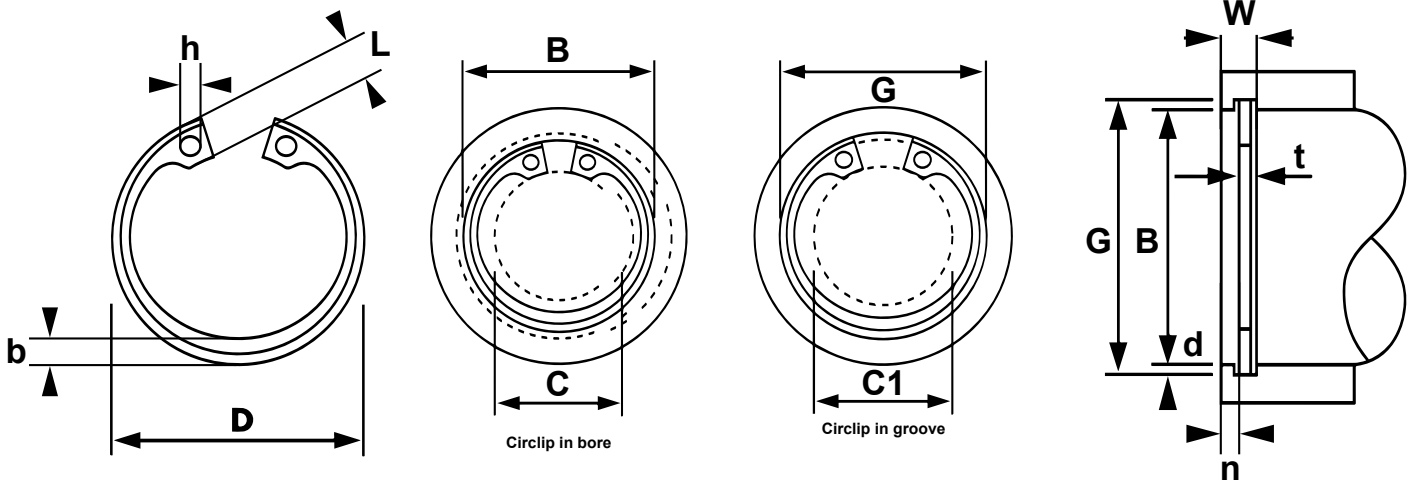

Alternative lug for larger sizes




Most sizes over 200mm are without lugs



Beam configuration for some larger sizes


Size Code	Bore		Groove (G)							Circlips (F)							
	B	G	Tol.	W	Tol.	n (min.)	d~	t	Tol.	D	Tol.	C	C1	L (max)	b~	h(min.)	
1300-10	10	10.4	"(+0.11 -0.00"	1.1	"(+0.14 -0.00"	0.6	0.2	1	-	10.8	-	3.3	4	3.2	1.4	1.2	
1300-11	11	11.4		1.1		0.6	0.2	1	-	11.8		4.1	4.8	3.3	1.5	1.2	
1300-12	12	12.5		1.1		0.8	0.25	1	-	13		4.9	5.7	3.4	1.7	1.5	
1300-13	13	13.6		1.1		0.9	0.3	1	-	14.1		5.4	6.4	3.6	1.8	1.5	
1300-14	14	14.6		1.1		0.9	0.3	1	-	15.1		6.2	7.2	3.7	1.9	1.7	
1300-15	15	15.7		1.1		1.1	0.35	1	-	16.2		7.2	8.3	3.7	2	1.7	
1300-16	16	16.8		1.1		1.2	0.4	1	-	17.3		8	9.2	3.8	2	1.7	
1300-17	17	17.8		1.1		1.2	0.4	1	-	18.3		8.8	10	3.9	2.1	1.7	
1300-18	18	19	"(+0.13 -0.00"	1.1	"(+0.14 -0.00"	1.5	0.5	1	-	19.5	"(+0.42 -0.13"	9.4	10.8	4.1	2.2	2	
1300-19	19	20		1.1		1.5	0.5	1	-	20.5		10.4	11.8	4.1	2.2	2	
1300-20	20	21		1.1		1.5	0.5	1	-	21.5		11.2	12.6	4.2	2.3	2	
1300-21	21	22		1.1		1.5	0.5	1	-	22.5		12.2	13.6	4.2	2.4	2	
1300-22	22	23		1.1		1.5	0.5	1	-	23.5		13.2	14.6	4.2	2.5	2	
1300-24	24	25.2		1.3		1.8	0.6	1.2	-	25.9		14.8	16.4	4.4	2.6	2	
1300-25	25	26.2		1.3		1.8	0.6	1.2	-	26.9		15.5	17.2	4.5	2.7	2	
1300-26	26	27.2		"(+0.21 -0.00"		1.3	"(+0.42 -0.21"	1.8	0.6	1.2		-	27.9	16.1	17.8	4.7	2.8
1300-27	27	28.4	1.3		2.1	0.7		1.2	-	29.1	17.1	19	4.7	2.9	2		
1300-28	28	29.4	1.3		2.1	0.7		1.2	-	30.1	17.9	19.8	4.8	2.9	2		
1300-29	29	30.4	1.3		2.1	0.7		1.2	-	31.1	18.9	20.8	4.8	3	2		
1300-30	30	31.4	"(+0.25 -0.00"		1.3	"(+0.42 -0.21"		2.1	0.7	1.2	-	32.1	19.9	21.8	4.8	3	2
1300-32	32	33.7			1.3			2.6	0.85	1.2	-	34.4	20.6	22.9	5.4	3.2	2.5

Size Code	Bore			Groove (G)						Circlips (F)										
	B	G	Tol.	W	Tol.	n (min.)	d~	t	Tol.	D	Tol.	C	C1	L (max)	b~	h(min.)				
1300-34	34	35.7	"(+0.25 (-)0.00"	1.6	"(+0.14 (-)0.00"	2.6	0.85	1.5	"(+0.00 (-)0.06"	36.5	"(+0.50 (-)0.25"	22.6	24.9	5.4	3.3	2.5				
1300-35	35	37		1.6		3	1	1.5		37.8		23.6	26.2	5.4	3.4	2.5				
1300-36	36	38		1.6		3	1	1.5		38.8		24.6	27.2	5.4	3.5	2.5				
1300-37	37	39		1.6		3	1	1.5		39.8		25.4	28	5.5	3.6	2.5				
1300-38	38	40		1.6		3	1	1.5		40.8		26.4	29	5.5	3.7	2.5				
1300-39	39	41		1.6		3	1	1.5		42		27.3	29.8	5.6	3.8	2.5				
1300-40	40	42.5		1.85		3.8	1.25	1.75		43.5		27.8	30.9	5.8	3.9	2.5				
1300-42	42	44.5		1.85		3.8	1.25	1.75		45.5		29.6	32.7	5.9	4.1	2.5				
1300-45	45	47.5		1.85		3.8	1.25	1.75		48.5		32	35.1	6.5	4.3	2.5				
1300-47	47	49.5		1.85		3.8	1.25	1.75		50.5		33.5	36.7	6.4	4.4	2.5				
1300-50	50	53	"(+0.30 (-)0.00"	2.15	"(+0.14 (-)0.00"	4.5	1.5	2	"(+0.00 (-)0.07"	54.2	"(+1.10 (-)0.46"	36.3	40	6.5	4.6	2.5				
1300-51	51	54		2.15		4.5	1.5	2		55.2		37.3	41	6.5	4.7	2.5				
1300-52	52	55		2.15		4.5	1.5	2		56.2		37.9	41.6	6.7	4.7	2.5				
1300-55	55	58		2.15		4.5	1.5	2		59.2		40.7	44.4	6.8	5	2.5				
1300-56	56	59		2.15		4.5	1.5	2		60.2		41.7	45.4	6.8	5.1	2.5				
1300-57	57	60		2.15		4.5	1.5	2		62.2		42.7	46.4	6.8	5.1	2.5				
1300-58	58	61		2.15		4.5	1.5	2		62.2		43.5	47.2	6.9	5.2	2.5				
1300-59	59	-		-		-	-	-		-		-	-	-	-	-	-	-	-	-
1300-60	60	63		2.15		4.5	1.5	2		64.2		44.7	48.4	7.3	5.4	2.5				
1300-61	61	-		2.15		-	-	-		-		-	-	-	-	-	-	-	-	-
1300-62	62	65	2.15	4.5	1.5	2	66.2	46.7	50.4	7.3	5.5	2.5								
1300-63	63	66	2.15	4.5	1.5	2	67.2	47.7	51.4	7.3	5.5	2.5								
1300-64	64	-	2.65	4.5	1.5	2.5	68.2	48.7	52.4	7.3	5.2	2.5								
1300-65	65	68	2.65	4.5	1.5	2.5	69.2	49.0	52.8	7.6	5.8	3.0								
1300-67	67	70	2.65	4.5	1.5	2.5	72.5	50.8	54.6	7.7	6.0	3.0								
1300-68	68	71	2.65	4.5	1.5	2.5	72.5	51.6	55.4	7.8	6.1	3.0								
1300-70	70	73	"(+0.35 (-)0.00"	2.65	"(+0.18 (-)0.00"	4.5	1.5	2.5	"(+0.00 (-)0.08"	74.5	"(+1.30 (-)0.54"	53.6	57.4	7.8	6.2	3.0				
1300-72	72	75		2.65		4.5	1.5	2.5		76.5		55.6	59.4	7.8	6.4	3.0				
1300-75	75	78		2.65		4.5	1.5	2.5		79.5		58.6	62.4	7.8	6.6	3.0				
1300-80	80	83.5		2.65		5.3	1.8	2.5		82.5		62.1	66.5	8.5	7.0	3.0				
1300-85	85	88.5		3.15		5.3	1.8	3		90.5		66.9	71.3	8.6	7.2	3.5				
1300-90	90	93.5		3.15		5.3	1.8	3		95.5		71.9	76.3	8.6	7.6	3.5				
1300-95	95	98.5		3.15		5.3	1.8	3		100.5		76.5	80.9	8.8	8.1	3.5				
1300-100	100	103.5		3.15		5.3	1.8	3		105.5		80.6	85.1	9.2	8.4	3.5				

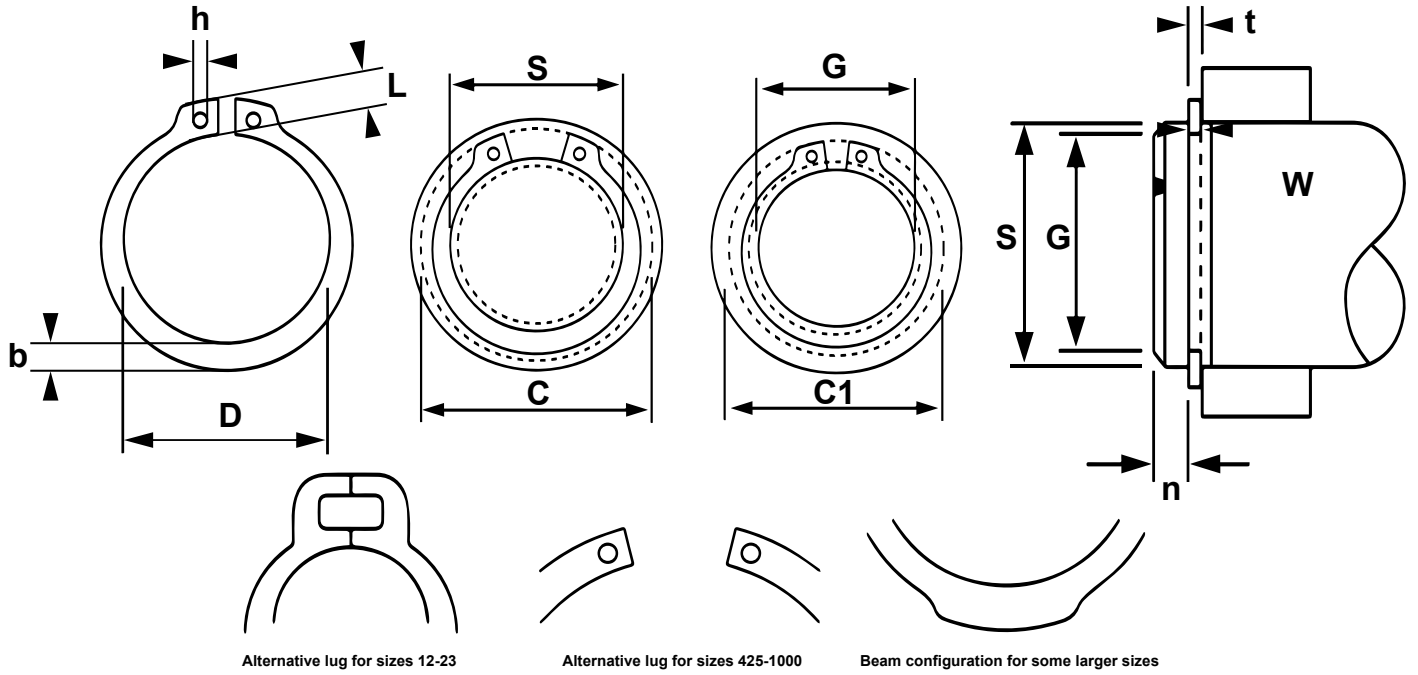

Size Code	Bore		Groove (G)							Circlips (F)						
	B	G	Tol.	W	Tol.	n (min.)	d~	t	Tol.	D	Tol.	C	C1	L (max)	b~	h(min.)
1400-4	4	3.8		0.5		0.3	0.1	0.4		3.7		8.6	8.2	2.2	0.9	1
1400-5	5	4.8	"(+) (-) 0.048"	0.7		0.3	0.1	0.6		4.7	"(+) (-) 0.15"	10.3	9.8	2.5	1.1	1
1400-6	6	5.7		0.8		0.5	0.15	0.7	"(+) (-) 0.05"	5.6		11.7	11.1	2.7	1.3	1.2
1400-7	7	6.7		0.9		0.5	0.15	0.8		6.5		13.5	12.9	3.1	1.4	1.2
1400-8	8	7.6	"(+) (-) 0.06"	0.9		0.6	0.2	0.8		7.4	"(+) (-) 0.18"	14.7	14	3.2	1.5	1.2
1400-9	9	8.6		1.1		0.6	0.2	1		8.4		16	15.2	3.3	1.7	1.2
1400-10	10	9.6		1.1		0.6	0.2	1		9.3		17	16.2	3.3	1.8	1.5
1400-11	11	10.5		1.1		0.8	0.25	1		10.2		18	17.1	3.3	1.8	1.5
1400-12	12	11.5		1.1		0.8	0.25	1		11		19	18.1	3.3	1.8	1.7
1400-13	13	12.4		1.1		0.9	0.3	1		11.9		20.2	19.2	3.4	2	1.7
1400-14	14	13.4		1.1		0.9	0.3	1		12.9		21.4	20.4	3.5	2.1	1.7
1400-15	15	14.3	"(+) (-) 0.11"	1.1		1.1	0.35	1		13.8	"(+) (-) 0.36"	22.5	21.5	3.6	2.2	1.7
1400-16	16	15.2		1.1	-	1.2	0.4	1		14.7		23.8	22.6	3.7	2.2	1.7
1400-17	17	16.2		1.1		1.2	0.4	1		15.7		25	23.8	3.8	2.3	1.7
1400-18	18	17		1.3		1.5	0.5	1.2	"(+) (-) 0.06"	16.5		26.2	24.8	3.9	2.4	2
1400-19	19	18		1.3		1.5	0.5	1.2		17.5		27.2	25.8	3.9	2.5	2
1400-20	20	19		1.3		1.5	0.5	1.2		18.5		28.4	27	4	2.6	2
1400-21	21	20	"(+) (-) 0.13"	1.3		1.5	0.5	1.2		19.5	"(+) (-) 0.42"	29.6	28.2	4.1	2.7	2
1400-22	22	21		1.3		1.5	0.5	1.2		20.5		30.8	29.4	4.2	2.8	2
1400-23	23	22		1.3		1.5	0.5	1.2		21.5		32	30.6	4.3	2.9	2
1400-24	24	22.9		1.3		1.7	0.55	1.2		22.2		33.2	31.7	4.4	3	2
1400-25	25	23.9		1.3		1.7	0.55	1.2		23.2		34.2	32.7	4.4	3	2
1400-26	26	24.9	"(+) (-) 0.21"	1.3		1.7	0.55	1.2		24.2	"(+) (-) 0.42"	35.5	33.9	4.5	3.1	2
1400-27	27	25.6		1.3		2.1	0.7	1.2		24.9		36.7	34.8	4.6	3.1	2
1400-28	28	26.6		1.6		2.1	0.7	1.5		25.9		37.9	36	4.7	3.2	2

Size Code	Bore			Groove (G)						Circlips (F)						
	B	G	Tol.	W	Tol.	n (min.)	d~	t	Tol.	D	Tol.	C	C1	L (max)	b~	h(min.)
1400-29	29	27.6	"(+0.00 (-)0.21"	1.6	"(+0.00 (-)0.06"	2.1	0.7	1.5	"(+0.00 (-)0.06"	26.9	"(+0.21 (-)0.42"	39.1	37.2	4.8	3.4	2
1400-30	30	28.6		1.6		2.1	0.7	1.5		27.9		40.5	38.6	5	3.5	2
1400-32	32	30.3	1.6	2.6		0.85	1.5	29.6		43		40.7	5.2	3.6	2.5	
1400-33	33	31.3	1.6	2.6		0.85	1.5	30.5		44	41.7	5.2	3.7	2.5		
1400-35	35	33	1.6	3		1	1.5	32.2		46.8	44.2	5.6	3.9	2.5		
1400-36	36	34	1.85	3		1	1.75	33.2		47.8	45.2	5.6	4	2.5		
1400-37	37	35	1.85	3		1	1.75	34.2		49	47	5.7	4.1	2.5		
1400-38	38	36	1.85	3		1	1.75	35.2		50.2	47.6	5.8	4.2	2.5		
1400-40	40	37.5	"(+0.00 (-)0.25"	1.85		3.8	1.25	1.75		36.5	52.6	49.5	6	4.4	2.5	
1400-41	41	38.5		1.85		3.8	1.25	1.75		37.5	54	51.5	6.2	4.5	2.5	
1400-42	42	39.5	1.85	3.8	1.25	1.75	38.5	55.7	52.5	6.5	4.5	2.5				
1400-45	45	42.5	1.85	3.8	1.25	1.75	41.5	59.1	55.9	6.7	4.7	2.5				
1400-47	47	44.5	1.85	3.8	1.25	1.75	43.5	61.3	58.1	6.8	4.9	2.5				
1400-48	48	45.5	1.85	3.8	1.25	1.75	44.5	62.5	59.3	6.9	5	2.5				
1400-50	50	47	2.15	4.5	1.5	2	45.8	64.5	60.8	6.9	5.1	2.5				
1400-52	52	49	2.15	"(+0.14 (-)0.00"	4.5	1.5	2	47.8	66.7	63	7	5.2	2.5			
1400-55	55	52	2.15		4.5	1.5	2	50.8	70.2	66.4	7.2	5.4	2.5			
1400-56	56	53	2.15		4.5	1.5	2	51.8	71.6	67.6	7.3	5.5	2.5			
1400-57	57	-	-		-	-	-	-	-	-	-	-	-	-		
1400-58	58	55	2.15		4.5	1.5	2	53.8	73.6	68.6	7.3	5.5	2.5			
1400-60	60	75	2.15		4.5	1.5	2	55.8	75.6	71.8	7.4	5.8	2.5			
1400-61	61	-	2.15		-	-	-	-	-	-	-	-	-	-		
1400-62	62	59	2.15		4.5	1.5	2	57.8	77.8	74	7.5	6.0	2.5			
1400-63	63	60	"(+0.00 (-)0.30"		2.15	4.5	1.5	2	58.8	79.0	75.2	7.6	6.2	2.5		
1400-64	64	-			-	-	-	-	-	60.8	81.4	77.6	7.8	6.3	3.0	
1400-65	65	62	2.65	4.5	1.5	2.5	62.5	83.6	79.8	7.9	6.4	3.0				
1400-67	67	64	2.65	4.5	1.5	2.5	63.5	84.4	81.0	8.0	6.5	3.0				
1400-68	68	65	2.65	4.5	1.5	2.5	65.5	87.0	83.2	8.1	6.6	3.0				
1400-70	70	67	2.65	4.5	1.5	2.5	67.5	89.2	85.4	8.2	6.8	3.0				
1400-72	72	69	2.65	4.5	1.5	2.5	70.5	92.7	88.8	8.4	7.0	3.0				
1400-75	75	72	2.65	5.3	1.75	2.5	74.5	98.1	93.7	8.6	7.4	3.0				
1400-80	80	76	2.65	5.3	1.75	3	79.5	103.3	98.9	8.7	7.8	3.5				
1400-85	85	81.5	"(+0.00 (-)0.35"	3.15	"(+0.18 (-)0.00"	5.3	1.75	3	"(+0.00 (-)0.08"	84.5	"(+0.54 (-)1.13"	108.5	104.0	8.8	8.2	3.5
1400-90	90	86.5		3.15		5.3	1.75	3		89.5		114.8	111.0	9.4	8.6	3.5
1400-95	95	91.5		3.15		5.3	1.75	3		94.5	120.2	116.0	9.6	9.0	3.5	
1400-100	100	96.5		3.15		5.3	1.75	3								

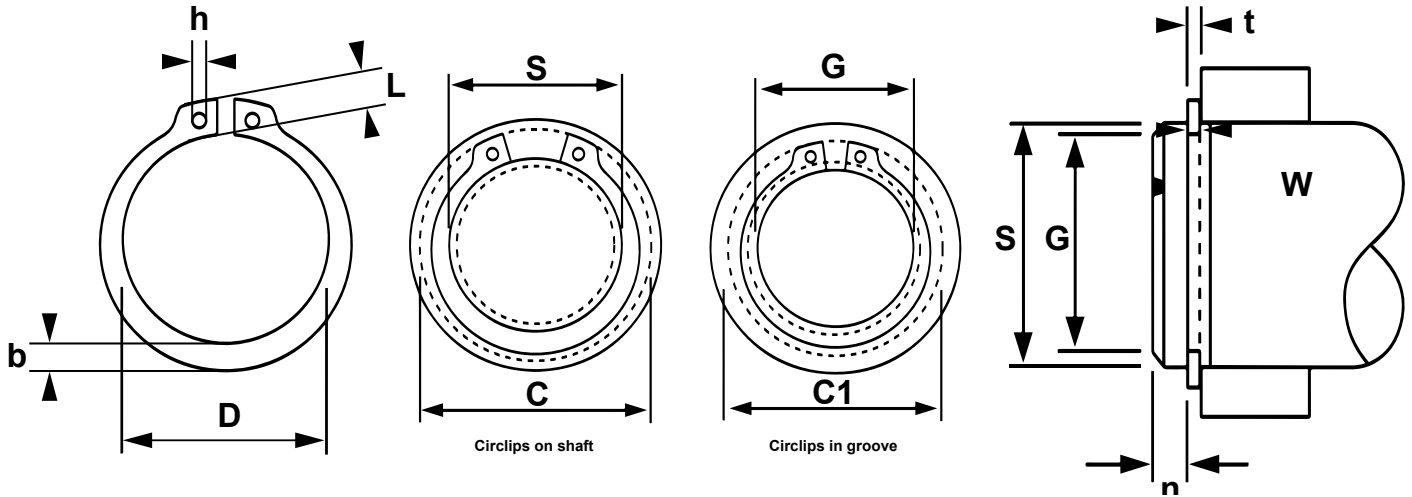

Size Code	Shaft		Groove (G)				Circlips (F)							Wt (kg/k)	Tc (N)	Tg (N)			
	S	G	Tol.	W	Tol.	n	d	t	Tol.	D	Tol.	C	C1				L	b	h
1460-12	12	11.5		1.6		0.7	0.25	1.5		11		19.3	8.3	3.4	1.8	1.7	0.75	17500	1130
1460-15	15	14.3	" $+0.00$ $-0.01$ "	1.6		1.1	0.35	1.5	" $+0.00$ $-0.06$ "	13.8	" $+0.10$ $-0.36$ "	25.1	3.9	4.8	2	2	1.1	21900	2260
1460-18	18	17		1.6		1.5	0.5	1.5		16.5		28.7	27.2	5.1	2.7	2	1.56	26300	4070
1460-20	20	19	$+0.00$	1.85		1.5	0.5	1.75		18.5		31.5	30	5.5	3	2	2.19	34100	4150
1460-25	25	23.9		2.15		1.7	0.55	2		23.2		38.3	36.7	6.4	3.4	2	3.59	48700	6130
1460-28	28	26.6	" $+0.00$ $-0.21$ "	2.15		2.1	0.7	2		25.9	" $+0.13$ $-0.42$ "	41.5	39.6	6.5	3.5	2	4.25	54500	8440
1460-30	30	28.6		2.15		2.1	0.7	2		27.9		43.5	41.6	6.5	4.1	2	5.35	58400	9610
1460-32	32	30.3		2.15		2.6	0.85	2		29.6		45.5	43.3	6.5	4.1	2.5	5.85	62300	10200
1460-35	35	33		2.65		3	1	2.5	" $+0.00$ $-0.07$ "	32.2	$+0.25$	48.9	46.4	6.7	4.2	2.5	7.2	85200	13200
1460-38	38	36		2.65		3	1	2.5		35.2		52.1	49.6	6.8	4.3	2.5	8.3	92500	15800
1460-40	40	37.5	" $+0.00$ $-0.25$ "	2.65		3.8	1.25	2.5		36.5		55	51.5	7	4.4	2.5		80900	18800
1460-42	42	39.5		2.65		3.8	1.25	2.5		38.5		57.4	53.9	7.2	4.5	2.5	8.6	84900	19800
1460-45	45	42.5		2.65	$+0.14$ $0.00$	3.8	1.25	2.5		41.5	" $+0.39$ $-0.90$ "	61	57.5	7.5	4.7	2.5	9.3	91000	21200
1460-48	48	45.5		2.65		3.8	1.25	2.5		4.5		64.6	61.1	7.8	5	2.5	10.7	97100	22600
1460-50	50	47		3.15		4.5	1.5	3		45.8		67	63	8	5.1	2.5	11.3	121000	28300
1460-55	55	52		3.15		4.5	1.5	3	" $+0.00$ $-0.08$ "	50.8		73	69	8.5	5.4	2.5	15.3	133000	31100
1460-58	58	55		3.15		4.5	1.5	3		53.8		76.6	72.6	8.8	5.6	2.5	17.1	141000	32800
1460-60	60	57		3.15		4.5	1.5	3		55.8		79	75	9	5.8	2.5	18.9	146000	33900
1460-65	65	62	" $+0.00$ $-0.30$ "	4.15		4.5	1.5	4		60.8	" $+0.46$ $-1.10$ "	84.6	80.6	9.3	6.3	3	19.4	210000	36800
1460-70	70	67		4.15		4.5	1.5	4		65.5		90	86	9.5	6.6	3	29.1	226000	39600
1460-75	75	72		4.15		4.5	1.5	4		70.5		95.4	91.4	9.7	7	3	35.3	243000	424000
1460-80	80	76.5		4.15		5.3	1.75	4		74.5		100.6	96.1	9.8	7.4	3	39.3	259000	52800
1460-85	85	81.5		4.15		5.3	1.75	4	$+0.00$	79.5		106	101.5	10	7.8	3.5	43.7	275000	56100
1460-90	90	86.5	$+0.00-0.35$	4.15		5.3	1.75	4		84.5		111.4	106.9	10.2	8.2	3.5	48.5	291000	59400
1460-95	95	91.5		4.15		5.3	1.75	4		89.5	" $+0.54$ $-1.30$ "	116.6	112.1	10.3	8.6	3.5	59.4	307000	62700
1460-100	100	96.5		4.15		5.3	1.75	4		94.5		122	117.5	10.5	9	3.5	61.2	324000	66000

# TRANSDRIVE®

## DRIVE PERFORMANCE

Need more information about  
TransDrive products, customised  
products and services, get in touch.

[info@transdrive.com.au](mailto:info@transdrive.com.au)  
[transdrive.com.au](http://transdrive.com.au)

Supplier

